
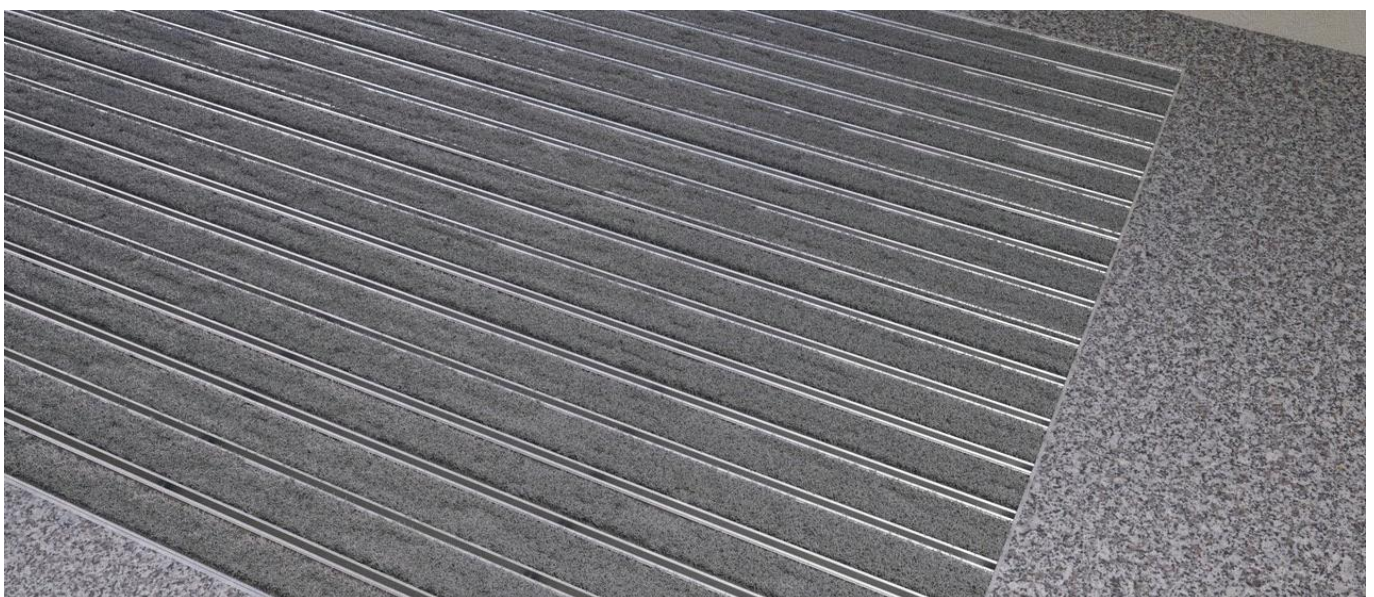



**ANTI-SLIP ALUMINUM CARPET ENTRANCE MATTING**

**NCFM 22**

**Aluminum-Carpet High Profile**

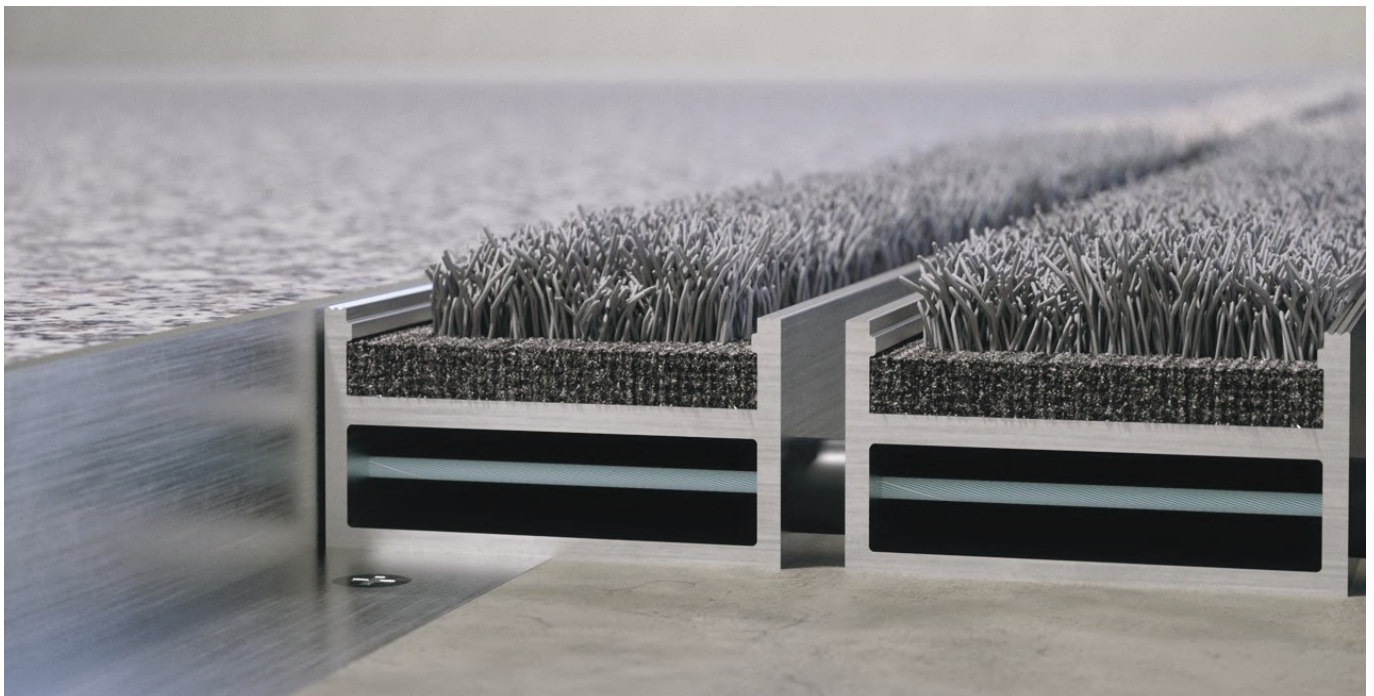

## NCFM 22

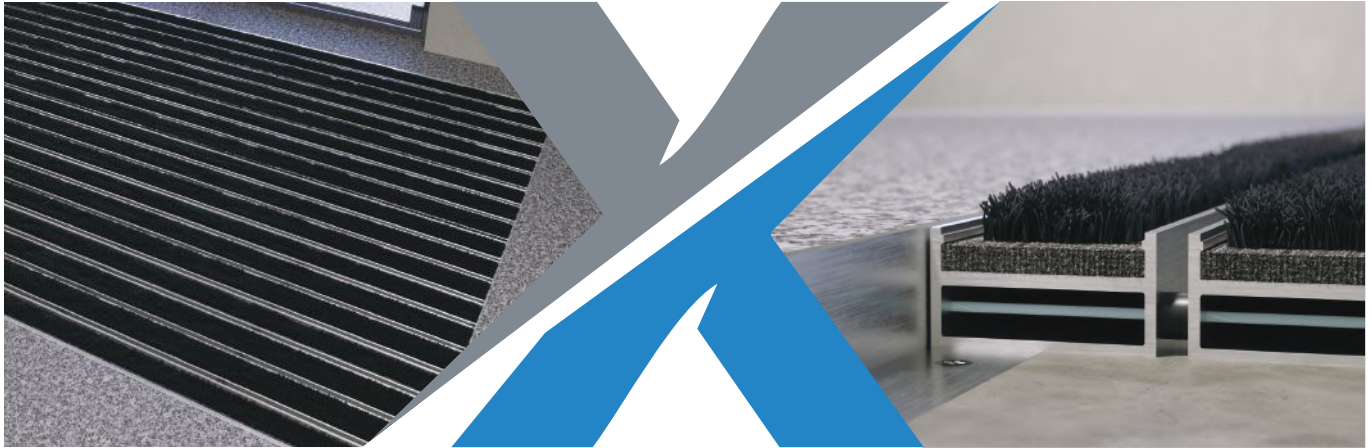

High Profile entrance matting corrosion-resistant version can be used for outside as well as inside areas with normal traffic areas. It prevents dirt and moisture from entering the building and is laid on a shock absorbing damping foam. This type reduces noise generated from heavy traffic and is greatly capable of collecting dirt. The panels are connected to each other through a stainless steel wire.

<b>ALUMINIUM PROFILE</b>	Aluminium profile alloy 6063-T6, wall thickness 1.1 mm for laying directly into existing or new matwells.
<b>UPPER</b>	Anti slip ribbed carpet insert, UV-resistant heavy-duty conforming to DIN 51130.
<b>UNDERNEATH</b>	Base of the mat is mechanically fitted with shock absorbing damping foam. panels are connected with stainless steel wire.
<b>PROFILE COLOURS</b>	Material can be in mill finish aluminum or anodized silver, gold or bronze colors with a variety of colors for carpet inserts.



Use in the outside area



Use in the inside area



Wheelchair accessible



Recyclable

